




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : G06F 3/00, 13/00, 15/40, H01H 67/00, H04Q , H04J 3/24, H04M 1/64</p>	<p>A1</p>	<p>(11) International Publication Number: WO 97/25665</p> <p>(43) International Publication Date: 17 July 1997 (17.07.97)</p>
<p>(21) International Application Number: PCT/US96/19596</p> <p>(22) International Filing Date: 9 December 1996 (09.12.96)</p> <p>(30) Priority Data: 08/582,536 3 January 1996 (03.01.96) US</p> <p>(71) Applicant: STERLING COMMERCE, INC. [US/US]; Suite 1200, 300 Crescent Court, Dallas, TX 75201 (US).</p> <p>(72) Inventor: HADLAND, John, K.; 335 Cedar Street, Omaha, NE 68108-1219 (US).</p> <p>(74) Agent: MILLS, Jerry, W.; Baker & Botts, L.L.P., 2001 Ross Avenue, Dallas, TX 75201-2980 (US).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>

(54) Title: **PROTOCOL CONVERTER APPARATUS AND METHOD**

(57) Abstract

A protocol converter (14) allows communications between a host (12) and remotes (16, 18, 20) that operate using different communications protocols. The protocol converter (14) includes processes (50) and subsystems (60) for establishing a communications session between the remotes (16, 18, 20) and the host (12). The processes include a session manager (52), a set of facilities (54), and a set of utilities (56). The subsystems include a logon subsystem (62), a communications subsystem (64), and a translator subsystem (66).

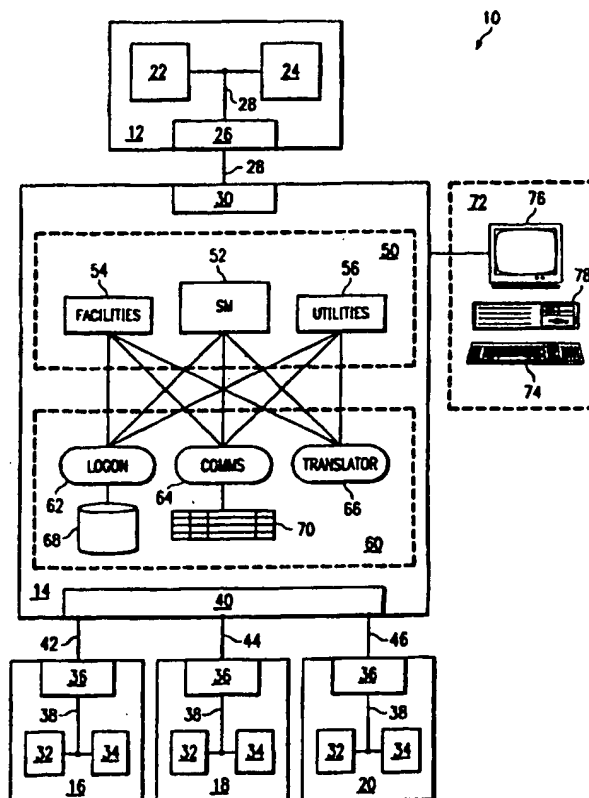

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

PROTOCOL CONVERTER APPARATUS AND METHOD

TECHNICAL FIELD OF THE INVENTION

5 This invention relates in general to communications, and more particularly to a protocol converter apparatus and method.

BACKGROUND OF THE INVENTION

10 A communications system includes a collection of interconnected devices. Often these devices communicate data using different protocols. For example, a remote that communicates data in a first protocol may desire to access a host that communicates data in a second protocol. A protocol converter may be used to allow
15 communications between the remote and the host.

As communications systems become larger and more complex to serve a variety of devices, protocol converters should adapt to service an ever-increasing number of communications protocols. Hardware-based
20 protocol converters are difficult to adapt to service new protocols. Current software-based protocol converters often suffer from a lack of modular design, an inflexible and unreliable hardware/software interface, and an inability to adapt quickly and efficiently to new and
25 changing communications protocols.

SUMMARY OF THE INVENTION

In accordance with the present invention, the disadvantages and problems associated with protocol

converters in a communications system have been substantially reduced or eliminated.

5 In accordance with one embodiment of the present invention, a communications system includes a remote that transmits first data in a first protocol and a host that receives second data in a second protocol. A protocol converter coupled to the remote and the host receives first data from the remote. The protocol converter includes a first facility, a utility, and a second
10 facility running as processes on the protocol converter. The first facility communicates first data to the utility, the utility translates first data into second data, and the second facility communicates the second data to the host.

15 Important technical advantages of the present invention include a protocol converter with a modular design to adapt quickly and efficiently to new and changing communications protocols. This modular design is provided by software processes called facilities and
20 utilities. A facility provides support for a specific link layer communications protocol, whereas a utility provides translation between higher level protocols. In a particular embodiment, utilities may be cascaded to provide layered protocol support.

25 Another important technical advantage includes managing the communications between facilities and utilities. In one embodiment, a communications subsystem maintains a process table having an entry for each process running on the protocol converter. In this
30 manner, functions between utilities and facilities are isolated, process interfaces are clearly defined and robust, and the hardware/software interface in the protocol converter is accurately defined and reliably maintained. Other important technical advantages of the
35 present invention include a session manager that spawns facilities and utilities, a logon subsystem, and a

translator subsystem. Other technical advantages are readily apparent to one skilled in the art from the following figures, descriptions, and claims.

5 BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the present invention, and for further features and advantages, reference is now made to the following description taken in conjunction with the accompanying drawings, in which:

10 FIGURE 1 illustrates a communications system having a protocol converter;

FIGURE 2 illustrates a simplified block diagram of the operation of the protocol converter;

15 FIGURES 3A and 3B are a flow chart of a method for establishing a communications session using the protocol converter; and

FIGURE 4 is a flow chart of a method to manage communications among the processes running on the protocol converter.

20

DETAILED DESCRIPTION OF THE INVENTION

FIGURE 1 illustrates a communications system 10 that includes a host 12, a protocol converter 14, and a plurality of remotes 16, 18, and 20. Host 12 and remotes 16, 18, and 20 may operate using different communications protocols. A protocol is generally any format, definition, or specification for the communication of data, whether implemented in software, hardware, or both. A protocol may include, without limitation, transmission rates, frame formats, blocking formats, text formats, stop/start indicators, framing and heading indicators, field definitions, checksum values, carriage return and line feed (CR/LF) indicators, and any other suitable information that specifies the content or nature of the transmitted data. In general, protocol converter 14

25

30

35

establishes communications sessions that allow host 12 and remotes 16, 18, and 20 to exchange data.

Host 12 comprises a memory 22 and a processor 24 that together operate to store, process, or manipulate data. Memory 22 and processor 24 are coupled to an interface 26 using bus 28. Interface 26 of host 12 couples to interface 30 of protocol converter 14 using link 28. Generally, host 12 may be any processing device coupled to any suitable wireline or wireless link 28 to communicate data with other processing devices. In one particular embodiment, host 12 comprises a main frame computer and link 28 communicates data using the IBM 3770 communications protocol.

Remotes 16, 18, and 20 each include a memory 32 and a processor 34 that together operate to store, process, or manipulate data. Memory 32 and processor 34 of remotes 16, 18, and 20 are coupled to an interface 36 using bus 38. Interfaces 36 for remotes 16, 18, and 20 couple to interface 40 of protocol converter 14 using links 42, 44, and 46, respectively. Generally, remotes 16, 18, and 20 may be any processing device coupled to any suitable wireline or wireless link 42, 44, and 46, respectively, to communicate data with other processing devices. For example, remotes 16, 18, and 20 may be mainframes, mini-frames, or personal computers and links 42, 44, and 46, respectively, communicate data using ASYNC, BISYNC, SDLC/SNA, X.25, TCP/IP, X.400, or any suitable communications protocol. For example, the ASYNC family of protocols may include specific implementations, such as XMODEM, YMODEM, ZMODEM, KERMIT, or other standards of asynchronous data communications.

As described above, protocol converter 14 couples to host 12 using interface 30 and to remotes 16, 18, and 20 using interface 40. In a particular embodiment, interface 30 comprises IBM host LUA hardware that implements the IBM communications manager. Interface 30

may also be any other suitable hardware that supports token ring, leased line, or switched line communications between protocol converter 14 and host 12. In a particular embodiment, interface 40 comprises one or more
5 real-time interface coprocessors (RTIC) cards that implement any suitable synchronous, asynchronous, or other communications protocol between remotes 16, 18, and 20 and protocol converter 14.

Interfaces 30 and 40 are coupled to and interact
10 with processes 50 and subsystems 60 of protocol converter 14. Processes 50 include a session manager 52, a set of facilities 54, and a set of utilities 56. Subsystems 60 include a logon subsystem 62, a communications subsystem 64, and a translator subsystem 66. Logon subsystem 62 is
15 coupled to a logon database 68 that stores configuration data and logon definitions for users of protocol converter 14. Communications subsystem 64 is coupled to a process table 70 that maintains a list of processes 50 running on protocol converter 14. In a particular
20 embodiment, subsystems 60 are dynamically linked libraries (DLLs) that are accessed using an application programmer interface (API).

An important technical advantage of protocol converter 14 is the use of facilities 54 and utilities 56
25 running as software processes on protocol converter 14. Protocol converter 14 maintains a set of facilities 54, each designed to support a specific link layer or line layer communications protocol, such as ASYNC, BISYNC, X.25, and others. In a particular embodiment, facilities
30 54 support an ASYNC passthrough protocol that passes data to utilities 56 with a minimum of alteration. Utilities 56 may then provide much of the protocol conversion of the raw ASYNC passthrough data in software, which provides greater flexibility for supporting new
35 protocols. If a link layer protocol is changed or a new link layer protocol is added, additional facilities 54

may be written or existing facilities 54 may be modified to add additional functionality to protocol converter 14.

Protocol converter 14 also maintains a set of utilities 56 that provide higher level protocols, such as TCP/IP, XMODEM, YMODEM, ZMODEM, and KERMIT, as well as conversion, translation, formatting, or other interfacing functions between two facilities 54 in a communications session. Furthermore, utilities 56 may be written to provide customized communications sessions associated with individual users, groups of users, or specific devices in communications system 10. Additional utilities 56 may be written or existing utilities 56 modified to add functionality to protocol converter 14.

Utilities 56 may also be cascaded to provide layered protocol support. For example, a typical TCP/IP communications session between remote 16 and protocol converter 14 may be supported by a single ASYNC facility and several cascaded or layered utilities. In such a session, the lowest level ASYNC facility receives data from remote 16 and communicates the data to an Internet protocol (IP) utility. The IP utility then communicates the data to a transport communication protocol (TCP) utility, which in turn communicates the data to the highest level file transfer protocol (FTP) utility. Similarly, data communicated from protocol converter 14 to remote 16 passes through FTP utility, TCP utility, IP utility, and ASYNC facility. In this manner, utilities 56 may be arranged in layers to provide a flexible and powerful protocol conversion function. It should be understood that utility 56 may refer to a single utility or a collection of cascaded or layered utilities.

Both facilities 54 and utilities 56 operate as software processes with defined functions and data interfaces that provide a modular software design that promotes debugging and modification of protocol converter 14. By spawning, linking, and layering facilities 54 and

utilities 56, session manager 52 can reliably construct a variety of communications sessions in protocol converter 14.

5 Protocol converter 14 may operate on one or more computers, shown generally as computer 72. Computer 72 maintains and executes the instructions to implement processes 50 and subsystems 60. Computer 72 may include an input device 74, such as a keypad, touch screen, or other device that can accept information. Output device 10 76 conveys information associated with the operation of protocol converter 14, including digital or analog data, visual information, or audio information. Both input device 74 and output device 76 may include fixed or removable storage media, such as a magnetic computer 15 disk, CD-ROM, or other suitable media to both receive output from and provide input to protocol converter 14. Processor 78 and its associated volatile or non-volatile memory execute instructions and manipulate information in accordance with the operation of protocol converter 14.

20 In operation, protocol converter 14 establishes a communications session between two or more devices using different communications protocol. In one example, remote 16 may desire to communicate with host 12. Remote 16 communicates data at a first protocol to interface 40 25 of protocol converter 14 using link 42. Interface 40 then passes this data to selected facilities 54 and utilities 56 to accomplish conversion of the data to a second protocol. The data in the second protocol is then passed to interface 30, which in turn passes the data in 30 the second protocol to host 12 using link 28.

 During communications between remote 16 and host 12, session manager 52 spawns processes 50, including selected facilities 54 and utilities 56. Communications subsystem 64 maintains a list of spawned processes 50 in 35 process table 70 to manage communications among processes 50. Logon subsystem 62 receives logon information from

remote 16 and accesses configuration data and logon definitions from logon database 68. This information may be used to select and/or configure processes 50 that establish the communications session between remote 16
5 and host 12. The translator subsystem 66 may be utilized by processes 50 to perform data conversions.

FIGURE 2 illustrates a simplified block diagram of the operation of protocol converter 14 to establish a communications session between remote 16 and host 12.
10 This communications session utilizes processes 50 and subsystems 60. Although FIGURE 2 describes the communications session as originating from remote 16 and terminating at host 12, it should be understood that the present invention contemplates unidirectional or
15 bidirectional communications originated from any processing device in communications system 10 and terminating at any other processing device.

Data in a first protocol from remote 16 is received at interface 40 of protocol converter 14. Interface 40
20 passes the data to facility 100 which supports the link layer communications protocol utilized by remote 16. Facility 100 communicates the content or existence of the received data to session manager 102 which spawns utility 104. Facility 100 then communicates data to utility 104.
25 In a particular embodiment, session manager 102 may spawn an additional utility 106 which couples to utility 104. Utility 106 communicates data to facility 108 which supports communication of data in a second link layer protocol utilized by host 12. Facility 108 then
30 communicates data in the second protocol to interface 30 for delivery to host 12. Utility 104, utility 106, or both may be comprised of several cascaded or layered utilities.

In one embodiment, utilities 104 and 106 may be a
35 single utility spawned by session manager 102, as indicated by dashed line 109. If utilities 104 and 106

are separate utilities spawned by session manager 102, then utility 104 may translate data received from facility 100 in a first protocol into raw data for delivery to utility 106. Raw data may be any suitable
5 generic representation of data that is communicated between utilities. This raw data may be coupled to other utilities 110 for translation and delivery to other devices. In addition, the output of utility 106 may be coupled to other facilities 112 for delivery to interface
10 30, interface 40, or other interface circuitry of protocol converter 14. For example, one of the other facilities 112 may couple to a portion of interface 40 to deliver data in a first protocol from remote 16 to data in a second protocol to remote 18, remote 20, or both.

15 During the establishment of a communications session between remote 16 and host 12, communications subsystem 64 generates a process table 70 that includes an entry for processes 50 running on protocol converter 14. Processes 50 may be entered into process table 70 as the
20 communications session is established or may already be entered upon power up or initialization of protocol converter 14. Each entry in process table 70 includes a process name 120, a process ID 122, data 124, and a semaphore 126.

25 For the particular embodiment of FIGURE 2, process table 70 includes the following entries to support the communications session between remote 16 and host 12: facility 100, session manager 102, utility 104, utility 106, and facility 108. Each entry is given a separate
30 identifier 122 that is used in messaging between processes 50. For example, a message sent from facility 100 to utility 104 may specify its source process ID 122 as "1" and its destination process ID 122 as "3". Communications subsystem 64 operates to control the
35 messaging between processes 50, as described in more detail below with reference to FIGURE 4.

Logon subsystem 62 coupled to logon database 68 is accessible by all processes 50 to retrieve configuration data and logon definitions for users of protocol converter 14. For example, logon database 68 may include
5 a logon definition that specifies utility 104 to be spawned by session manager 102 upon reception of data from remote 16. Logon database 68 may also include a second or outgoing logon definition for remote 16 that specifies utility 106 or other utilities 110 to be
10 spawned by session manager 102 for completing the communications session. In this manner, logon subsystem 62 can maintain separate incoming and outgoing logon definitions that are associated with a first communications link between remote 16 and protocol
15 converter 14 and a second communications link between protocol converter 14 and host 12. These logon definitions may be combined to establish a variety of communications session between devices in communications system 10. In addition, logon subsystem 62 may retrieve
20 information from logon database 68 to validate a user name and password provided by remote 16, or to access or process other account information of remote 16.

Translator subsystem 66 may be accessed by utilities 104, 106, and 110 to provide data translation. For
25 example, utility 104 may desire data to be translated from ASCII format into an IBM-compatible format, such as EBCDIC. In addition, translator subsystem 66 may also be utilized by utilities 104, 106, and 110 to manipulate records separation, such as carriage return and line feed
30 information, and to provide other formatting of data. Therefore, translator subsystem 66 comprises a set of commonly accessible routines that perform a specific operation on data.

FIGURES 3A and 3B are a flow chart of a method for
35 establishing a communications session between remote 16 and host 12. The method begins at step 200 where a first

interface 40 receives data from remote 16. The data is transferred to first facility 100 at step 202. First facility 100 then sends a message to session manager 102 at step 204 indicating that first facility 100 has
5 received data from or otherwise established communications with remote 16. At this point, session manager 102 may proceed using two different embodiments, as indicated collectively by steps 205 or 221.

In one embodiment using steps 205, session manager
10 102 spawns first utility 104 at step 206 in response to the message received from first facility 100. At step 208, session manager 102 sends a message to first utility 104 with the message source designated as first facility 100. In response, first utility 104 sends an
15 acknowledgment to first facility 100 at step 210. In this manner, session manager 102 utilizes the source address of the message sent to first utility 104 to establish communications between first facility 100 and first utility 104. First utility 104, now coupled with
20 first facility 100, receives logon information from remote 16 at step 212. At step 214, first utility 104 accesses logon subsystem 62 to validate logon information received from remote 16. If the logon information is not validated at step 214, then the communications session is
25 terminated at step 216.

In another embodiment using steps 221, session manager 102 receives logon information from first facility 100 at step 220. At step 222, session manager
30 102 accesses logon subsystem 62 and logon database 68 to validate logon information received from remote 16. If the logon information is not validated at step 222, then the communications session is terminated at step 224. If the logon information is validated at step 222, then session manager 102 spawns first utility 104 at step 226
35 in response to the logon information. For example, the logon information received by session manager 102 from

remote 16 or logon database 68 may specify a particular utility 104 to be utilized in the communications session between remote 16 and host 12. At step 228, session manager 102 sends a message to first utility 104 with the message source designated as first facility 100. First utility 104 sends an acknowledgment to first facility 100 at step 230. This acknowledgment of the message received from session manager 102 establishes communications between first facility 100 and first utility 104.

After spawning first utility 104 using steps 205 or steps 221, session manager 102 may spawn second utility 106. These steps designated collectively as steps 240 are optional if the communications session between remote 16 and host 12 does not utilize second utility 106. If second utility 106 is utilized in the communications session, then session manager 102 spawns second utility in response to logon information at step 242. For example, logon information received from remote 16 or retrieved using logon subsystem 62 and logon database 68 may specify second utility 106 to be utilized in the communications session. At step 244, session manager 102 sends a message to second utility 106 with the message source designated as first utility 104. Second utility 106 sends an acknowledgment to first utility 104 at step 246. This acknowledgment of the message received from session manager 102 establishes communications between first utility 104 and second utility 106.

Second facility 108 receives data from first utility 104 or second utility 106 at step 248, depending on whether the communications session between remote 16 and host 12 utilizes second utility 106. Second facility 108 transfers this data to second interface 30 at step 250. Second interface 30 establishes communications with host 12 at step 252, and the establishment of the communications session between remote 16 and host 12 is complete.

FIGURE 4 is a flow chart of a method to manage communications of messages among processes 50 running on protocol converter 14. In the embodiment of FIGURE 2, this method manages communications among the following process 50: facility 100, session manager 102, utility 104, utility 106, and facility 108. The method begins at step 300 where a first process informs communications subsystem 64 that it has data for a second process. This data may be a message, instruction, response, acknowledgment, or any other information to be communicated from the first process to the second process.

Communications subsystem 64 posts data in data field 124 of process table 70 associated with the second process at step 302. Communications subsystem 64 sets semaphore 126 of process table 70 associated with the second process at step 304. The second process then detects the setting of its associated semaphore 126 and receives data stored in its associated data field 124 at step 306.

In one embodiment, the second process may process the data and generate other data for a third process at step 308. The second process informs communications subsystem 64 that it has data for the third process at step 310. Communications subsystem 64 posts data in the data field 124 of process table 70 associated with the third process at step 312. Communications subsystem 64 sets semaphore 126 of process table 70 associated with the third process at step 314. The third process then detects its associated semaphore 126 and receives data from its associated data field 124 at step 316. In this manner, communications subsystem 64 utilizing process table 70 is able to strictly and consistently manage communications between separate processes 50 running on protocol converter 14.

Although the present invention has been described with several embodiments, a myriad of changes, variations, alterations, transformations, and modifications may be suggested to one skilled in the art, and it is intended that the present invention encompass such changes, variations, alterations, transformations, and modifications as fall within the spirit and scope of the appended claims.

WHAT IS CLAIMED IS:

1. A communications system comprising:
a remote operable to transmit first data in a first protocol;
5 a host operable to receive second data in a second protocol; and
a protocol converter coupled to the remote and the host, the protocol converter operable to receive first data from the remote, the protocol converter comprising a
10 first facility, a utility, and a second facility running as processes on the protocol converter, the first facility operable to communicate first data to the utility, the utility operable to translate first data into second data, and the second facility operable to
15 communicate the second data to the host.
2. The communications system of Claim 1, wherein the utility comprises:
a first utility operable to receive first data from
20 the first facility and to translate first data into raw data; and
a second utility operable to receive raw data from the first utility and to translate raw data into second data.
25
3. The communications system of Claim 1, wherein the protocol converter comprises a logon subsystem operable to retrieve logon information associated with the remote.
30
4. The communications system of Claim 1, wherein the protocol converter comprises a logon subsystem operable to retrieve logon information associated with the remote, wherein the logon information specifies the
35 utility.

5. The communications system of Claim 1, wherein the protocol converter comprises a communications subsystem operable to manage communications among the processes running on the protocol converter.

5

6. The communications system of Claim 1, wherein the protocol converter comprises:

a communications subsystem operable to manage communications among the processes running on the protocol converter; and

10

a process table coupled to the communications subsystem, the process table having an entry for each process running on the protocol converter.

15

7. The communications system of Claim 1, wherein the protocol converter comprises a session manager operable to spawn processes running on the protocol converter.

20

8. A protocol converter for communicating data between a remote and a host, the protocol converter comprising:

5 a first facility operable to receive first data in a first protocol from the remote;

a utility coupled to the first facility and operable to receive first data from the first facility, the utility operable to translate first data into second data in a second protocol; and

10 a second facility coupled to the utility, the second facility operable to receive second data from the utility and to communicate second data to the host.

9. The protocol converter of Claim 8, wherein the
15 first facility, the utility, and the second facility run as processes on the protocol converter.

10. The protocol converter of Claim 8, wherein the utility comprises:

20 a first utility operable to receive first data from the first facility and to translate first data into raw data; and

a second utility operable to receive raw data from the first utility and to translate raw data into second
25 data.

11. The protocol converter of Claim 8, further comprising a logon subsystem operable to retrieve logon information associated with the remote.

30

12. The protocol converter of Claim 8, further comprising a logon subsystem operable to retrieve logon information associated with the remote, wherein the logon information specifies the utility.

35

13. The protocol converter of Claim 8, wherein the first facility, the utility, and the second facility run as processes on the protocol converter, the protocol converter further comprising a communications subsystem operable to manage communications among the processes running on the protocol converter.

14. The protocol converter of Claim 8, wherein the first facility, the utility, and the second facility run as processes on the protocol converter, the protocol converter further comprising:

a communications subsystem operable to manage communications among the processes running on the protocol converter; and

a process table coupled to the communications subsystem, the process table having an entry for each process running on the protocol converter.

15. A method for communicating between a remote and a host, the method comprising:

receiving, at a first facility, first data in a first protocol from the remote;

5 translating, at a utility, first data into second data in a second protocol; and

communicating, at a second facility, second data to the host.

10 16. The method of Claim 15, further comprising the steps of:

transmitting a first message to a session manager in response to the first data; and

15 spawning the utility in response to the first message.

17. The method of Claim 15, further comprising the steps of:

20 transmitting a first message from the first facility to a session manager in response to the first data;

spawning the utility in response to the first message;

transmitting a second message from the session manager to the utility; and

25 transmitting an acknowledgment to the second message from the utility to the first facility.

18. The method of Claim 15, wherein the utility comprises a first utility and a second utility, and further comprising the steps of:

- 5 transmitting a first message from the first facility to a session manager in response to the first data;
- spawning the first utility in response to the first message;
- transmitting a second message from the session manager to the first utility;
- 10 transmitting an acknowledgment to the second message from the first utility to the first facility;
- spawning the second utility in response to the first message;
- transmitting a third message from the session manager to the second utility; and
- 15 transmitting an acknowledgment to the third message from the second utility to the first utility.

20 19. The method of Claim 15, further comprising the step of receiving logon information specifying the utility.

25 20. The method of Claim 15, further comprising the step of creating a process table having an entry for the first facility, the utility, and the second facility.

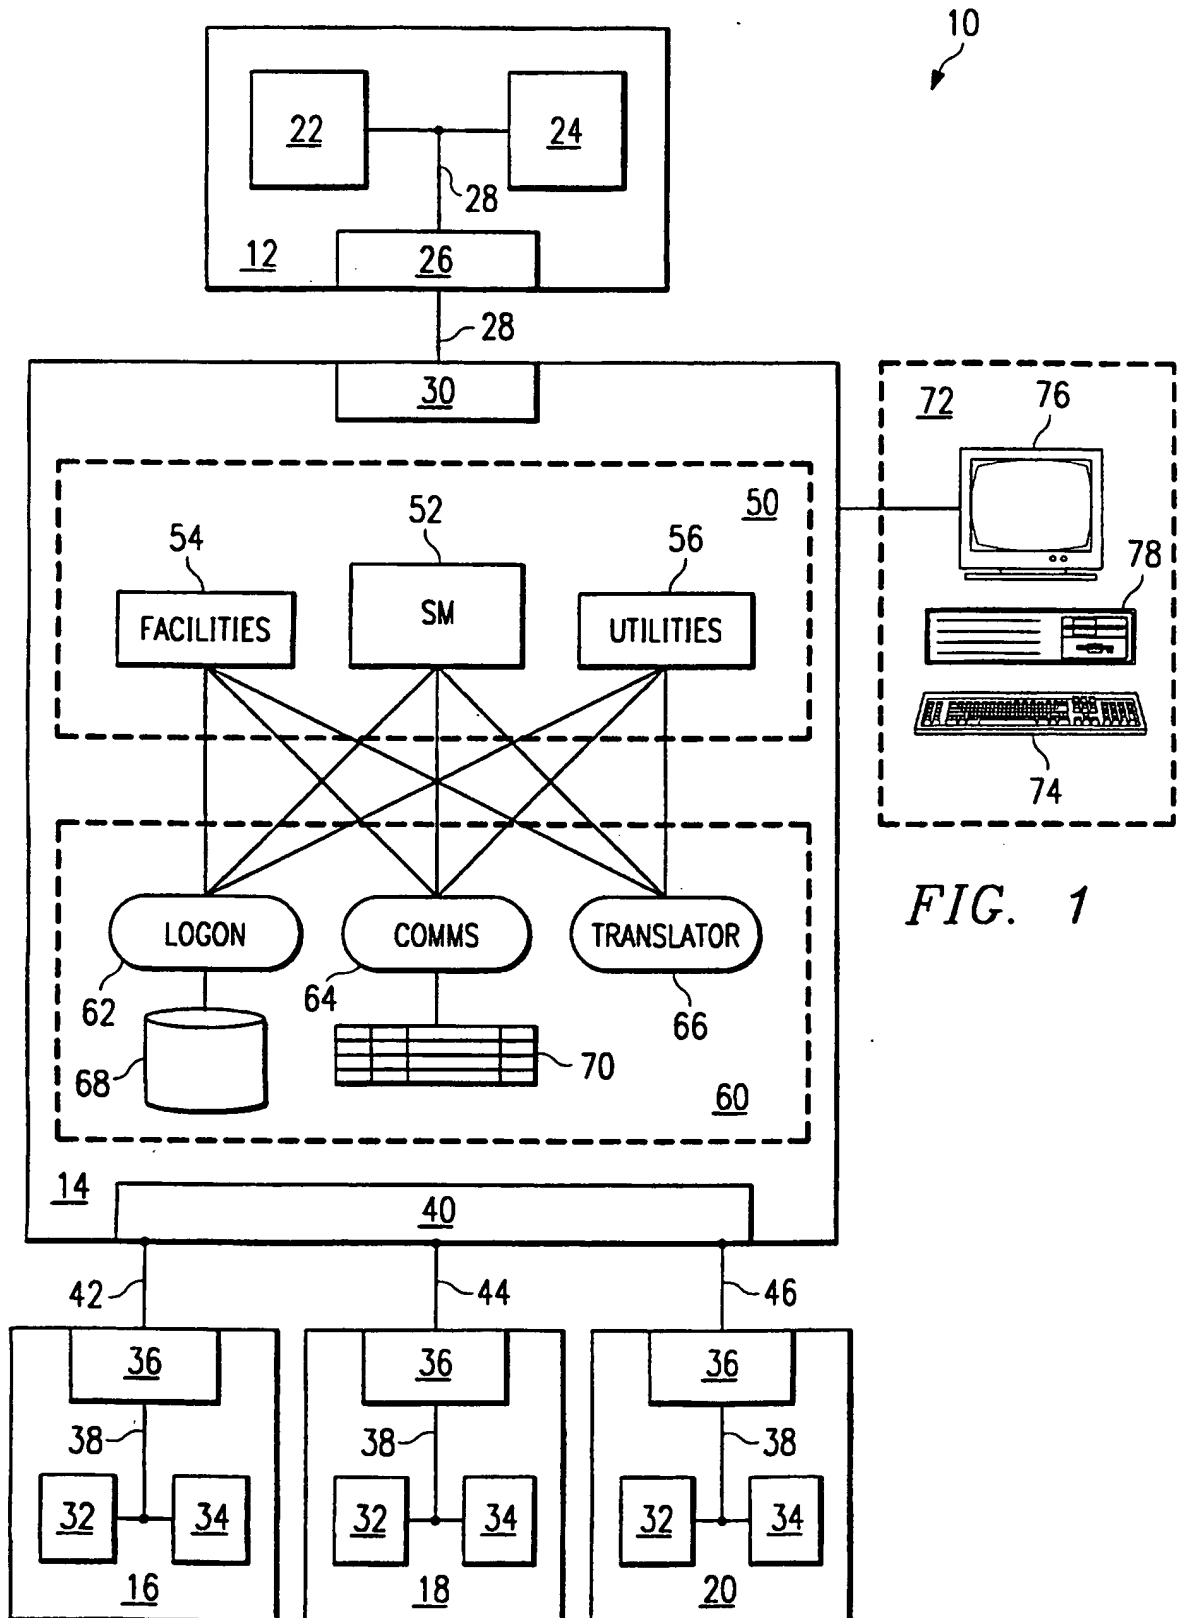


FIG. 1


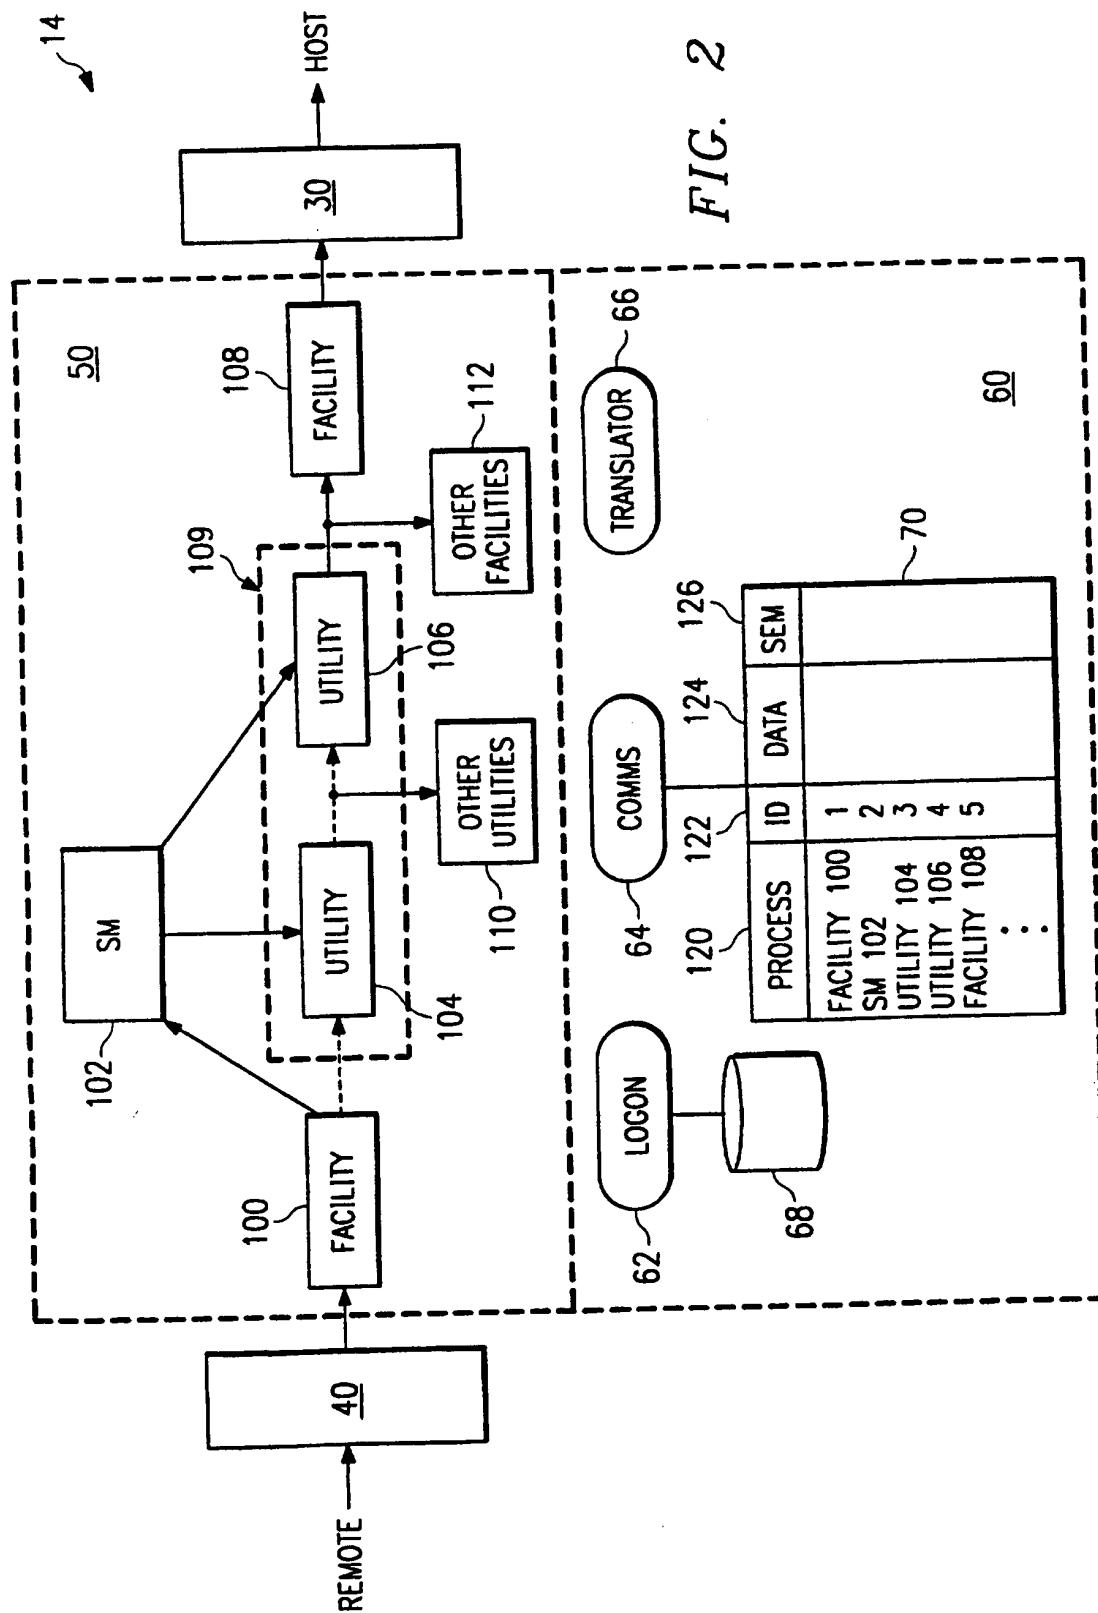


FIG. 2


3/4

FIG. 3A

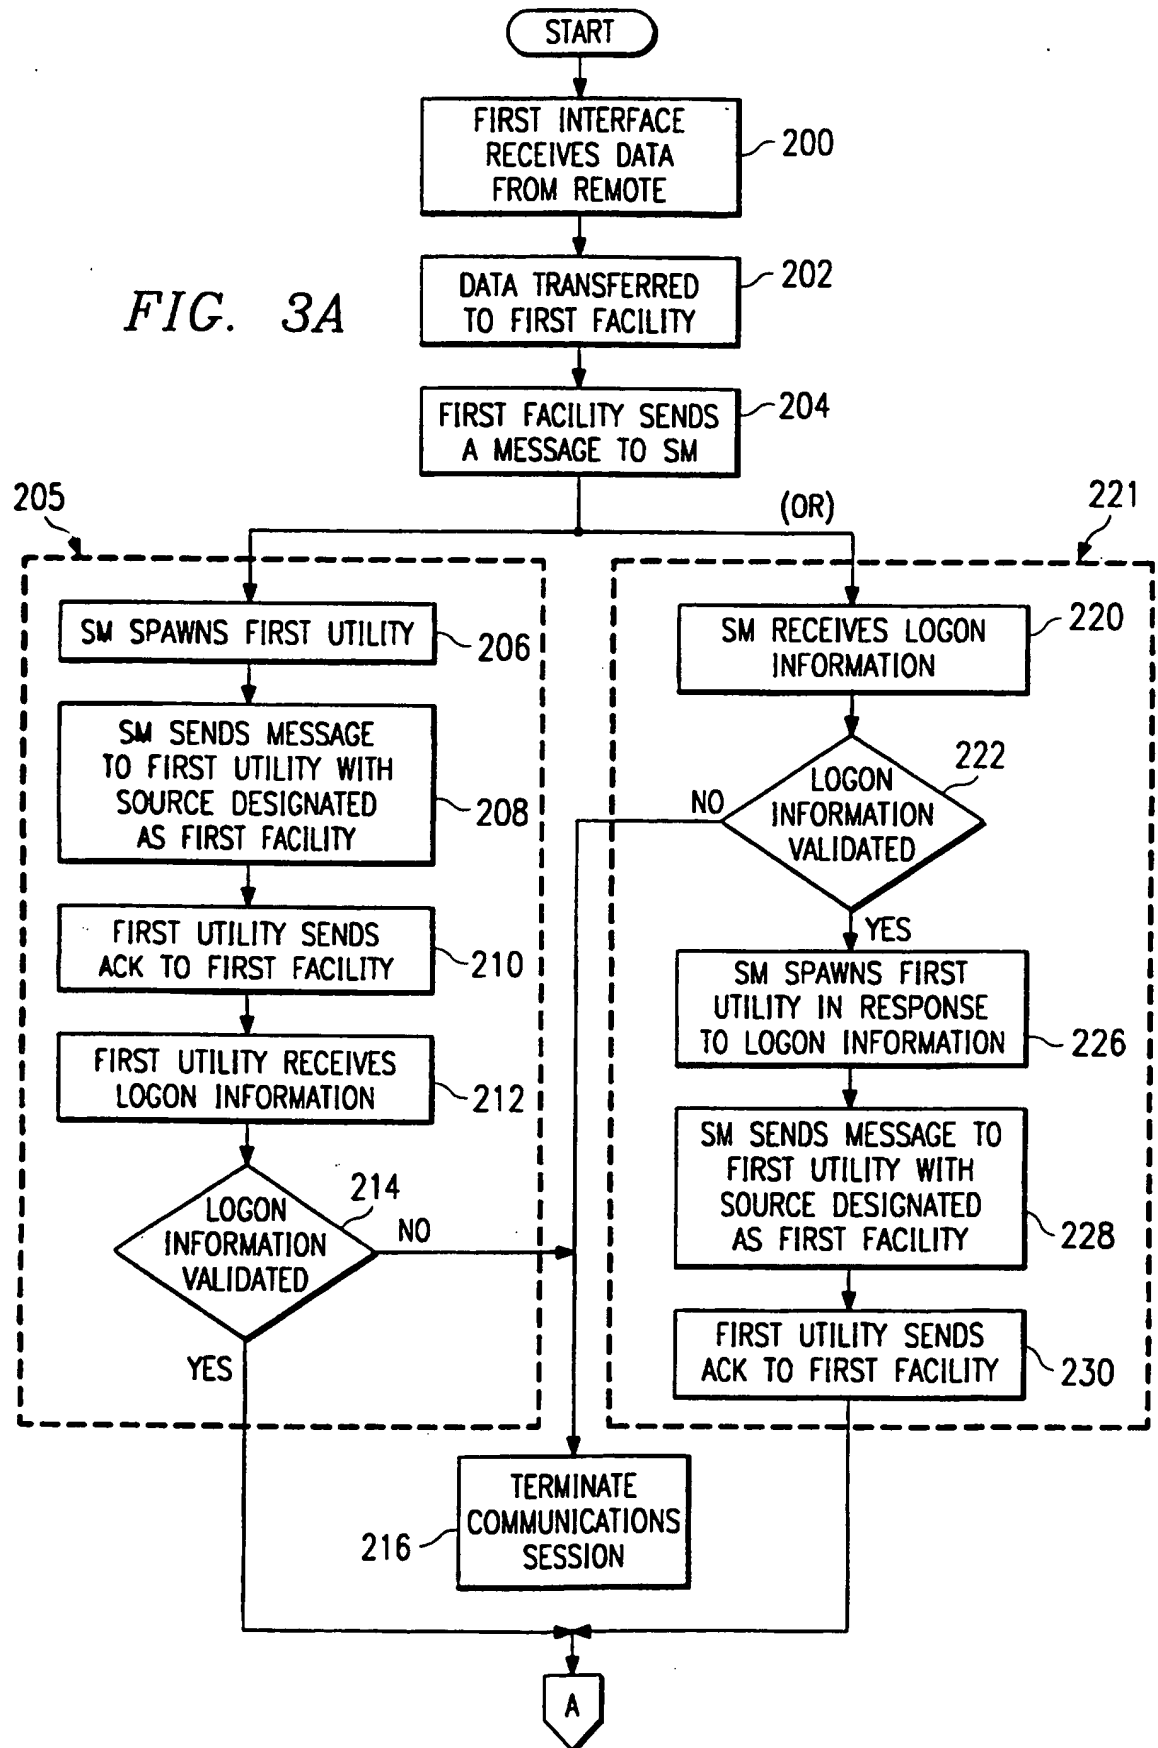

TO FIG. 3B

FIG. 4

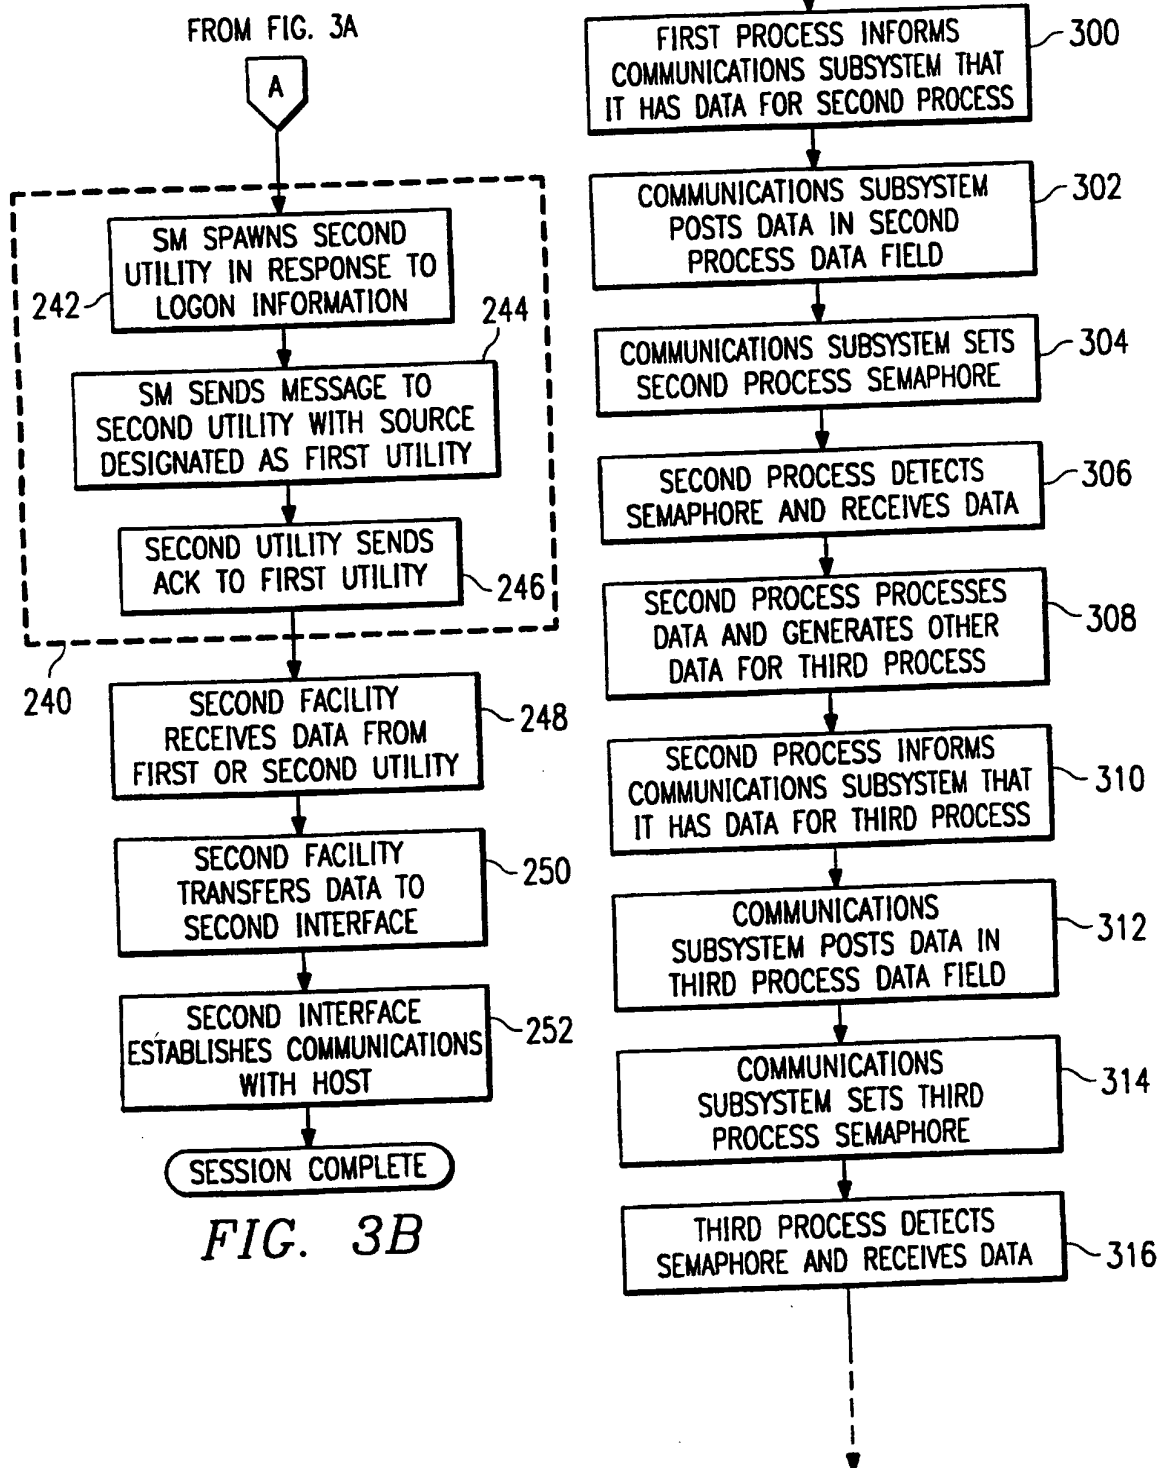

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US96/19596

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : G06F 3/00, 13/00 15/40; H01H 67/00; H04Q; H04J 3/24; H04M 1/64
US CL : 340/825.04, 825.8; 370/94.2; 379/93; 395/200

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 340/825.04, 825.8; 370/94.2; 379/93; 395/200

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched


Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
Please See Extra Sheet.

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y,P	US 5,530,434 A (KANDA) 25 JUNE 1996 (25.04.95) COLUMN 5, LINE 49-68, COLUMNS 6-10, COLUMN 11, LINES 1-52.	1-2, 8-10-15
Y	US 5,208,811 A (KASHIO et al) 04 MAY 1993 (01.11.90), COLUMN 2, LINES 21-68, COLUMN 3, LINES 1-5, COLUMN 8, LINES 7-68, COLUMN 9, LINES 1-46.	1-2, 8-10, 15
Y	US 5,276,732 A (STENT et al) 04 JANUARY 1994 (22.08.91), COLUMN 3, LINES 24-39, COLUMN 4, LINES 10-27, COLUMN 5, LINES 14-33.	1-2, 8-10, 15
Y	US 5,182,748 A (SAKATA et al) 26 JANUARY 1993 (18.10.90) COLUMN 3, LINES 49-68, COLUMN 4, COLUMN 5, LINE 1-20.	1-2, 8-10, 15

☒ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

	Special categories of cited documents:	T	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A	document defining the general state of the art which is not considered to be of particular relevance		
E	earlier document published on or after the international filing date	X	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
L	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	Y	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
O	document referring to an oral disclosure, use, exhibition or other means		
P	document published prior to the international filing date but later than the priority date claimed	A	document member of the same patent family

Date of the actual completion of the international search 24 MARCH 1997	Date of mailing of the international search report 19 MAY 1997
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230	Authorized officer  KEVIN KRIESS Telephone No. (703) 305-3900

Form PCT/ISA/210 (second sheet)(July 1992)*

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US96/19596

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y,P	US 5,497,373 A (HULEN et al) 05 MARCH 1996 (22.03.94) COLUMN 3, LINES 46-65, COLUMN 5, LINES 26-47, COLUMN 8, LINES 21-68, COLUMN 9, LINES 1-9, COLUMN 10, LINES 45-65, COLUMN 11, LINES 7-23.	1-2, 8-10, 15
Y	US 5,432,901 A (HARPER et al) 11 JULY 1995 (30.01.92), COLUMN 1, LINES 52-68, COLUMN 2, LINES 1-3, COLUMN 5, LINES 16-68, COLUMN 6, LINES 1-14, COLUMN 13, LINES 64-68, COLUMN 14, LINES 1-2.	3-7, 11-14, 16-20
Y	US 5,398,336 A (TANTRY et al) 14 March 1995 (16.07.93), column 10, lines 29-57, column 11, lines 34-44, column 12, lines 34-43, column 13, lines 36,55, column 14, lines 20-68, column15, lines 1-11, column 17, lines 53-68, column 18, lines 1-68.	3-7, 11-14, 16- 20

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US96/19596

B. FIELDS SEARCHED

Electronic data bases consulted (Name of data base and where practicable terms used):

APS

search terms: 395/200/ccis, logon, login, communications management, session management, protocol, conversion, process id, session id, process table, session table

THIS PAGE BLANK (USPTO)